

# RAILWAY TRACK EQUIPMENT

## Creep Adjuster

Licence:Permaquip:U.K.



The adjuster alters the longitudinal position of rails, to close or open rail creep. Obstructionless, enabling trains to pass over the track while the equipment is in its working position. The hoses are long enough to allow the hand pump to be kept at a safe distance from the rail. 330mm spigot center distance is suitable for all Broad Gauge rail sections. Special spigot center distance for Meter Gauge sections on request.



## OPERATION


The adjuster is easy to use. Spigots on the tool are pushed through the fish bolt holes from which the plates have been removed and the nuts tightened with the Adjuster's tommy bar or a standard fish bolt spanner. The control valve is then set to "push" or "pull" as required and the hand pump operated to adjust the rail gap.



## ADVANTAGES

Hydraulic stroke of 150mm available. Several lengths of rails can be adjusted in one operation. Safe and simple to operate without much operator training.

## NOMENCLATURE

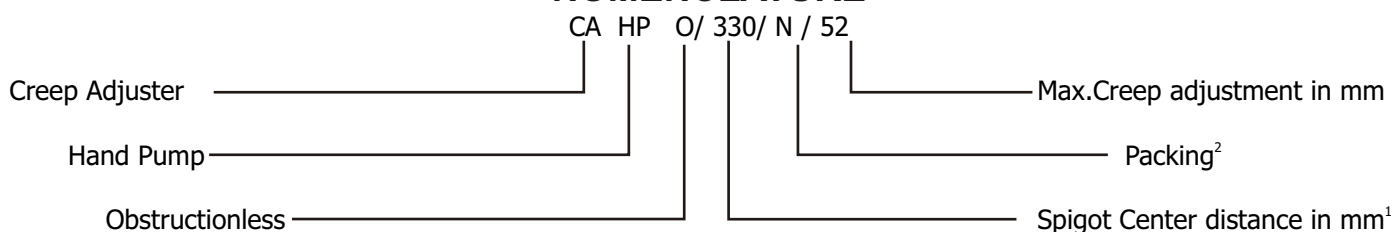

1. 330 for 52kg , 60kg, 90R T1(m) and 90B T2(m).

2. N = Normal  
R = Reusable

## SPARES & ACCESSORIES

List of recommended spares available on request. For Ancillary Track Tools see separate catalogue.

## TECHNICAL DETAILS

Type	Total weight without pump  kg	Overall dimensions		Weight of hand pump  kg	Max. Pushing Force  Tonne	Max. Pulling Force  Tonne
		Length  mm	Width  mm			
CA	25	720	350	17	7.5	6.8